

LDA NEO Extension 4500 is an extension controller and a 4x500W amplifier or 2x1000W amplifier for the compact EN 54-16 PA/VA system NEO.

This extension unit can scale the NEO system with 4 more zones as it includes 4 class D power amplifier channels at 100V or 70V lines.




Audio is transmitted from the main unit to this extension unit via daisy-chain connection via FlexNet. Therefore it guarantees maximum quality and integrity.

The extension is fully configurable with the NEO Configurator software (included with NEO). It is possible to configure remotely the unit as part of the whole NEO system and create events to perform actions in the system triggered by conditions of: input level, date&time, UDP command, a GPIO or button from MPS microphone.

Main Features:

- 4 class D amplifiers of 500W or 2 amplifiers of 1000W for 100V/70V lines.
- 4 pre-amp outputs for external PA amplifiers connection.
- DSP: 7-band input/output Parametric Equalizer, loudness, LDA sound enhancer, independent volume control per each output channel and audio filters.
- Triple Ethernet port: for Digital Audio Cobranet, remote control and supervision, and for escalating the system with NEO-Extensions in daisy-chain mode with Flexnet technology (up to 1024 zones).
- Control for up to 16 attenuators LDA AT6.
- 6 supervised contact relays for integration with Fire Alarm Control Panel

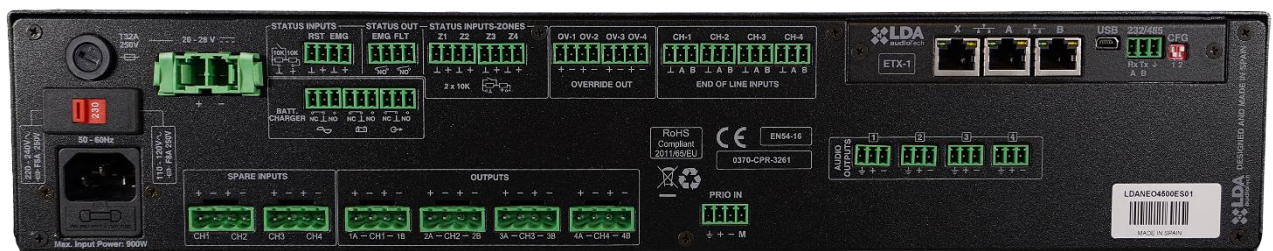

Technical specifications:

Model	NEO4500E
Power supply	110-120V / 220-240V bei 50/60Hz.
Power consumption	900W max. / 400W bei 1/8 Ausgangsleistung / 40W Standby
Frequency response	80 - 20.000Hz +/-3dB
Signal to noise ratio	>98dB, A-weighted
Distortion factor	<0,05 % under 60268-3
Gain adjustment per channel	-100dB bis 0dB, 1dB-steps
DSP	Integrated. 48 kHz, 24 Bit - 344 MIPS

FlexNet (Cobranet audio + control)	3 x FlexNet Redundant (automatic switching), Ethernet10/100Mbits. Female RJ-45
Pre- amp Audio Outputs	4 x Balanced audio 1Vp, 0,707Vrms. 100 , Ω 3Pin, Euroblock Type
ATT-Control	4 x Override 24V DC, 8 x 40mA, 2 Pin, Euroblock Type (4 pin connector)
Emergency control Inputs	6 x 0 - 5V DC, Monitored inputs, 2 Pin, Euroblock Type (4 pin connector)
Emergency control Outputs	2 x Relay contact Isolated Output, NO, Max 60V DC 130mA, 2 Pin Euroblock Type (4 pin connector)
Amplifier	4 x 500W Class D, (4 x 250Wrms) or 2 x 1000W (2 x 500Wrms) @ 70 / 100V. Min load 40 Ω/20 Ω
Speaker Outputs	8 (4 dual managed lines) x 70 /100V. 2 Pin, Euroblock Type (4 pin connector)
Spare Amplifier Inputs	4 x 500W @ 70 / 100V, 2 Pin, Euroblock Type (4 pin connector)
Protection	Over-temperature, DC, infrasonic, short circuit, slow start-up, overload. Start-up test
Emergency Power Input	1 x 20 - 28V DC, 32A, Fused (32 A), 2 Pin, Euroblock Type (2 pin connector)
Emergency Power status Inputs	3 x NO - NC, 3 Pin, Euroblock Type
Operating Condition	5 oC to +45 oC / 23 oF to 113 oF 5% to 95% Relative humidity (No condensation)
Finish	Front: Fe, Grey RAL 7016 Back: Fe, Black RAL 9005 Case: Al, Black RAL 9005
Weight	9,8 Kg / 21,61lb
Dimensions	483 mm x 88 mm x 455 mm / 19" x 3,46" x 18"
Accessory	2 x Rack mounting, Male Euroblock connectors, installation screws, 4 x Rubber foot, 1x Power cable 2m / 6,56ft (EU Type), 1 x Ethernet Cable 2m / 6,56ft

Rev. 1.4 (230828CB)